DUO CUBED

DUO Cubed è un illuminatore doppio, miniaturizzato -solo 117x45mm-, con lenti TIR proprietarie che, con l'aggiunta di lenti Fresnel, possono realizzare una larga varietà di apertura di flussi. L'elettronica assicura, tramite un sensore NTC applicato vicino ai LED, che quest'ultimi non abbiano una temperatura di esercizio superiore ai 65°C. Dal design minimale e tecnico, questo illuminatore può essere utilizzato sia a plafone che ad incasso. L'applicazione è rapida e precisa tramite le staffe date a corredo e l'aggancio a magneti al Neodimio.

With a minimal and technical design, this illuminator can be used both ceiling or recessed. The application is quick and precise using the accompanying brackets and the Neodymium magnet coupling.

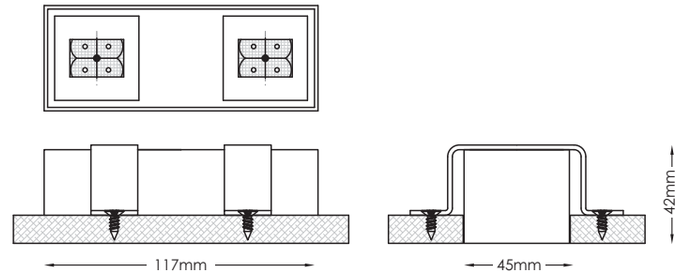

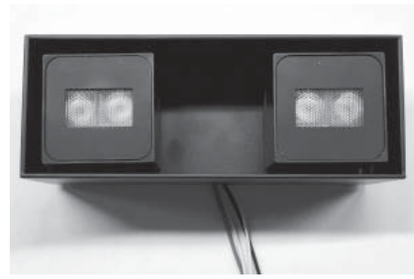

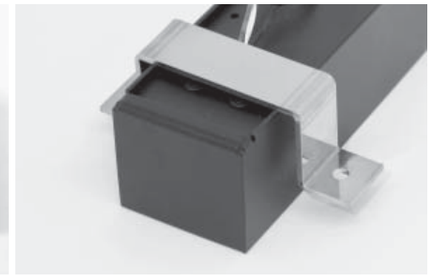

NUMERO LED/NUMBER LEDS - WHITE	2+2
FLUSSO/FLUX WHITE@700mA	792 Lm@2700K 820 Lm@3000K 900 Lm@4000K (a richiesta/upon request)
POTENZA/POWER @700mA 24Vdc	9,6W (2x4,8W)
TEMPERATURA AMBIENTE DI ESERCIZIO/OPERATING AMBIENT TEMPERATURE	-20°C/45°C
GESTIONE TEMPERATURA LED/ON BOARD ELECTRONICS	si/yes
DIMMERABILITA'/DIMMING	si, con segnale 24Vdc PWM/ yes, with 24Vdc PWM signal
CLASSE DI ISOLAMENTO/INSULATION CLASS	3
TIPO LENTE PRIMARIA/PRIMARY LENS	TIR
APERTURA ANGOLARE/VIEWING ANGLE	12°/25°/ 45°
GRADO IP/IP GRADE	44

IP44

TABELLA DI SELEZIONE/SELECTION TABLE
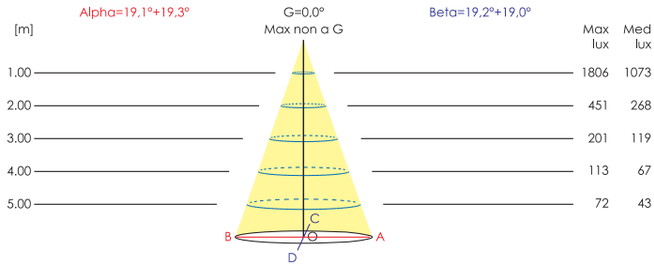
CODICE/CODE	ELETTRONICA/ELECTRONICS		LENTE/LENS		COLORE LED/ LED COLOUR		FINITURA/FINISHING	
173	700mA	11	12°	01	2700K	1	Matt white	02
			25°	02	3000K	2	Matt black	03
			45°	03	(4000K)	3	Gold	04
							Chrome	05
							Custom	C