


SNAP ON



Snap-ON è l'essenza degli illuminatori LED: ha il miglior rapporto flusso luminoso/superficie meccanica esposta. Questo è dovuto al fatto che la parte più ingombrante, ossia il dissipatore, è proporzionato in base al taglio di potenza utilizzato -5, 10 o 15W- ed è completamente svincolato dal faretto stesso. Dal momento in cui il faretto è svincolato, ha un sensore NTC a bordo che dà il feedback della temperatura dei LED, facendo in modo che l'elettronica di pilotaggio non eroghi più del convenuto, mantenendo i LED ad una temperatura non superiore ai 65°C. L'housing meccanico può avere diverse finiture e le lenti, cambiando semplicemente la lente Fresnel, possono dare un'ampia selezione di angoli di emissione. Patent Pending.

Snap-ON is the essence of LED illuminators: it has the best luminous flux ratio / exposed mechanical surface. This is due to the fact that the most bulky part, the heatsink, is proportional to the power cut used -5, 10 or 15W- and is completely free from the spotlight itself. From the moment the spotlight is released, it has an on-board NTC sensor that provides LED temperature feedback, making sure that the driving electronics does not deliver more than expected, keeping the LEDs at a temperature not more than 65 °C. Mechanical housing can have different finishes. Regarding viewing angles/lenses, by simply changing the Fresnel lens, can provide a wide selection of emission angles. Product Patent Pending.

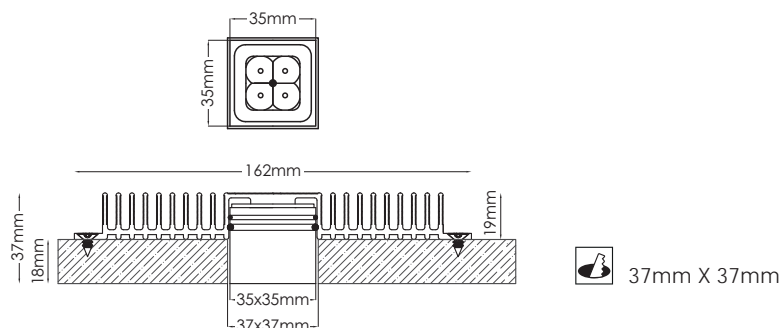


NUMERO LED/NUMBER LEDS - WHITE	4
FLUSSO/FLUX WHITE@700mA	792 Lm@2700K 792 Lm@3000K 850 Lm@4000K (a richiesta/upon request)
POTENZA/POWER @700mA 24Vdc	9,6W
TEMPERATURA AMBIENTE DI ESERCIZIO/OPERATING AMBIENT TEMPERATURE	-20°C/45°C
GESTIONE TEMPERATURA LED/ON BOARD ELECTRONICS	si/yes
DIMMERABILITA' /DIMMING	si, con segnale 24Vdc PWM/ yes, with 24Vdc PWM signal
CLASSE DI ISOLAMENTO/INSULATION CLASS	3
TIPO LENTE PRIMARIA/PRIMARY LENS	TIR
APERTURA ANGOLARE/VIEWING ANGLE	12°/25°/ 45°/ 15°x45°
GRADO IP/IP GRADE	20

TABELLA DI SELEZIONE/SELECTION TABLE


CODICE/CODE	ELETTRONICA/ELECTRONICS		LENTE/LENS		COLORE LED/ LED COLOUR		FINITURA/FINISHING	
250	on/off dimmable PWM@700mA	11	12°	01	2700K	1	Matt white	02
	on/off dimmable PWM@350mA	12	25°	02	3000K	2	Matt black	03
			45°	03	4000K	3	Gold	04
			15°x45°	04	5000K	4	Chrome	05
							Custom	C




15°x45° @480lm

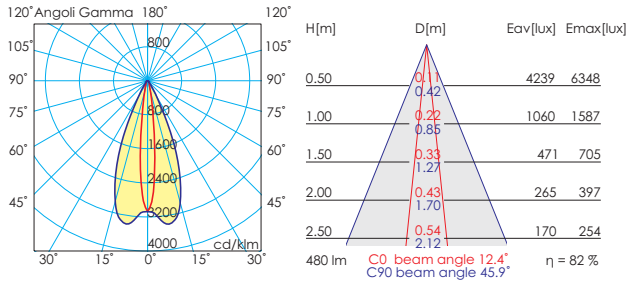


15°x45° @880lm

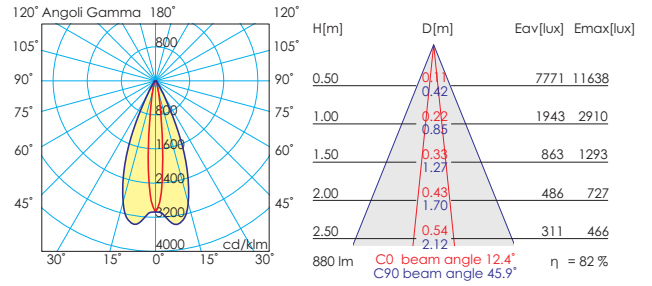


15°x50° asym 6° @480lm

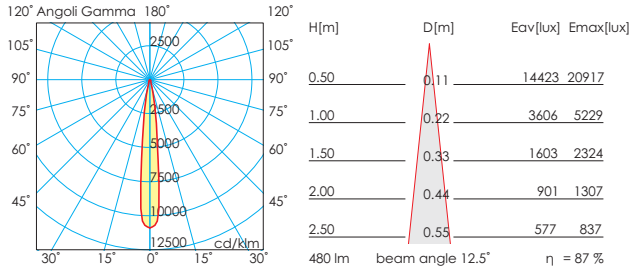


15°x50° asym 6° @880lm

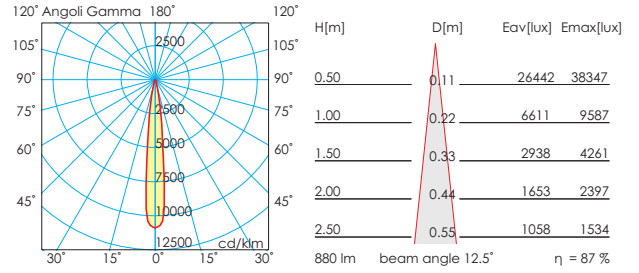


12° @480lm

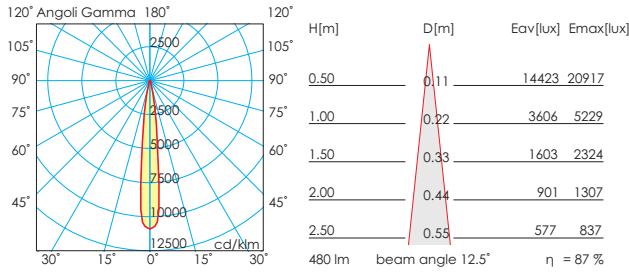


12° @880lm

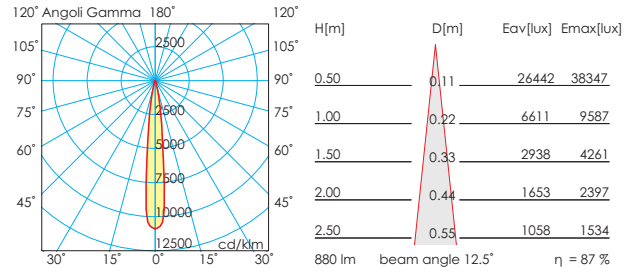


25° @480lm

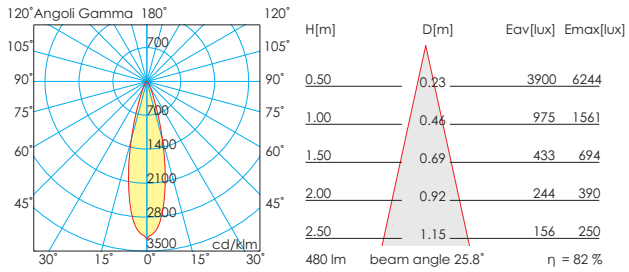

25° @880lm

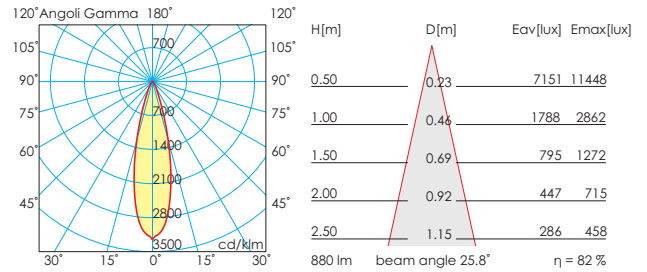

45° @480lm

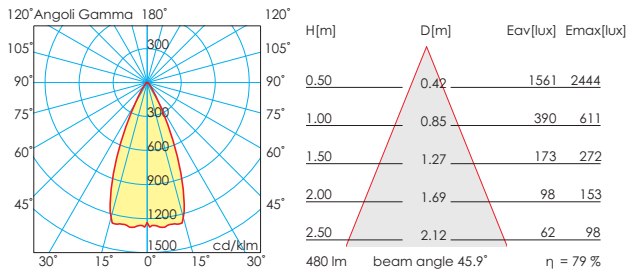

45° @880lm

