


FlexiLED 0410

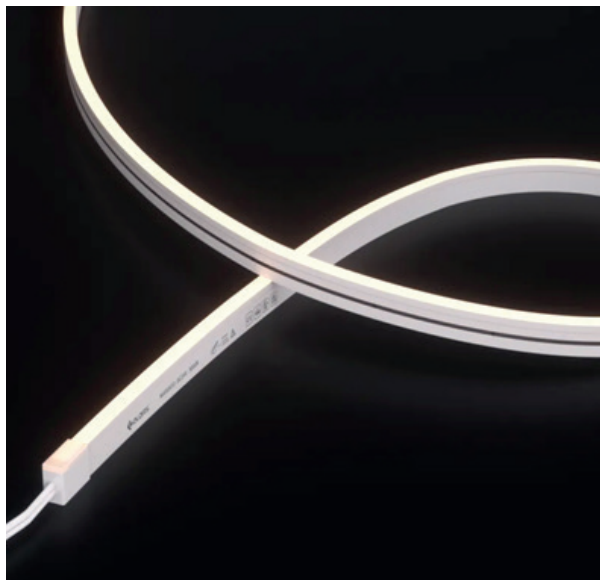

Descrizione del prodotto

Product description

- Illuminatore silicónico flessibile della serie FlexiLED.
 - Dimensione 4x10mm con caratteristica SIDE BEND, quindi, con curvatura "destra/sinistra"
 - Luce completamente omogenea
 - Resistente all'acqua salina e clorina e non ingiallisce sotto i raggi UV.
 - Grado di protezione IP67
 - Disponibile in rotte da 5mt o 10mt
 - Free-cut -taglio ogni 8,33mm-
-
- Flexible silicone illuminator from the FlexiLED series.
 - Size 10x10mm with 3D feature, therefore, both side bend and top bend.
 - Completely uniform light
 - Resistant to salt water and chlorine and does not yellow under UV rays
 - IP67 protection rating
 - Available in 5m or 10m rolls
 - Free-cut - cut every 8.33mm



Specifiche Elettriche / Electrical Specifications

Vin Range	18-32Vdc
Vin Typical	24Vdc
Potenza funzione FULL POWER / Power for the function FULL POWER	8W/mt
Dimming	SI/Yes, 24Vdc PWM
Durabilità / Life Span	>50.000h


Specifiche Opto-elettroniche @85°C / Opto-electronic specifications @85°C

CCT	2700K, 3000K, 4000K
CRI	>90
R9	>50
Flussi/Flux	240Lm/mt
Angolo di veduta / Beam angle	110°

Specifiche meccaniche / Mechanical specification

Dimensioni / Dimensions	10x10 mm
Materiali / Materials	Silicone
Finiture / Finishings	Silicone Bianco/ White Silicone
Grado IP IP Grade	67
Temperatura Operativa / Ambient Temperature	-20°C / +45°C
Piegatura / Bending	SIDE bend
Minima Lunghezza di taglio / Min. cutting lenght	41,66mm

Dimensioni meccaniche
Mechanical dimensions



·IP65 Glued cap-top outlet

