


-LEDLINE TINI 0606, DC24V.  
Cross section size 6mm x 6mm/  
0.24" x 0.24" (W x H), which is  
vertical bending with radius of  
25mm / 0.98".  
-IP67 protected, UV resistant,  
chemical resistant for indoor  
& outdoor solutions. Very easy  
to cut & reconnect on site.  
-3-Step MacAdam bin and dot  
free lighting guarantee the most  
excellent performance over the  
rated lifetime.

## DIMENSION

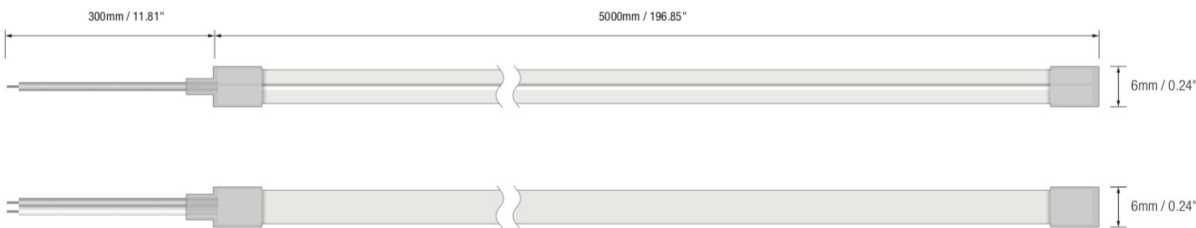

### Electrical data


Voltage	DC24V (23.5Vmin, 24.5Vmax)
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F <sub>min</sub> , 60°C /140°F <sub>max</sub>
Ambient Temperature	T <sub>a min</sub> = -25°C /-13°F, T <sub>a max</sub> = 55°C /131°F
Power(W/m W/ft)	6/1.8
Efficacy(lm/W)	62
Unit cut	25mm
CRI	Ra93
Warranty	3years

(Lm/m)

CCT \ Power	2700K	3000K	3500K	4000K	5000K	Max. Run Length
6W/M	340	332	382	372	361	5M

Note:

- Max.run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerance of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

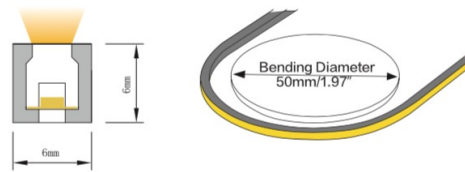

FlexiLED 0606

